






## FC1003-L

Housing Die-cast aluminum;  
 Finishing Powder coated in white;  
 Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;  
 Lens diffuser, beam angle 24°/36°/60°;  
 Exclusive design, brand led and driver to ensure long lifetime and high performance;  
 Certificated by CE, RoHS;  
 Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.




Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC1003-L	1x10W	24° 36° 60°	3000K	745lm 735lm 700lm	LENS	>82	White/ Black	220-240VAC	NULL	Size/CTN:485x455x345mm G.W./CTN:14.2kgs PCS/CTN:18pcs

CRI90 is available

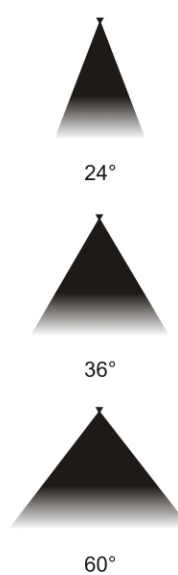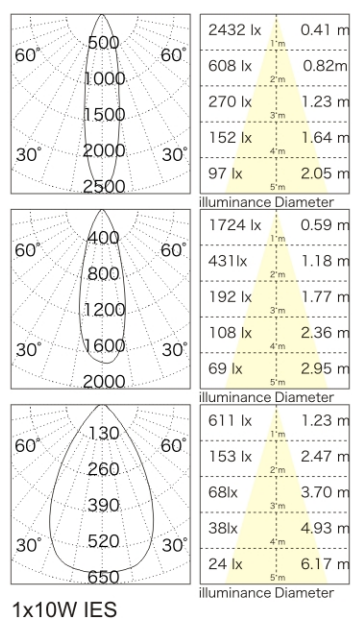



## FC1003-R

Housing Die-cast aluminum;  
 Finishing Powder coated in white;  
 Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;  
 Reflector diffuser, beam angle 15°/24°/38°/60°;  
 Exclusive design, brand led and driver to ensure long lifetime and high performance;  
 Certificated by CE, RoHS;  
 Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

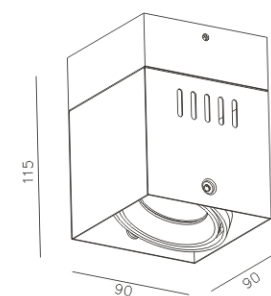

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC1003-R	1x10W	15° 24° 38° 60°	3000K	831lm 802lm 761lm 731lm	Reflector	>82	White/ Black	220-240VAC	NULL	Size/CTN:485x455x345mm G.W./CTN:14.2kgs PCS/CTN:18pcs

CRI90 is available

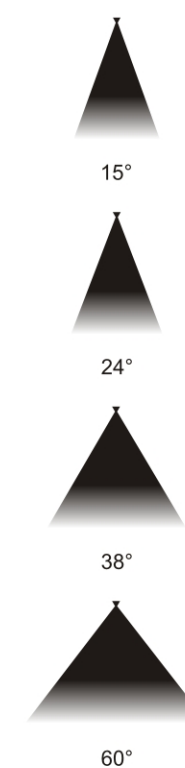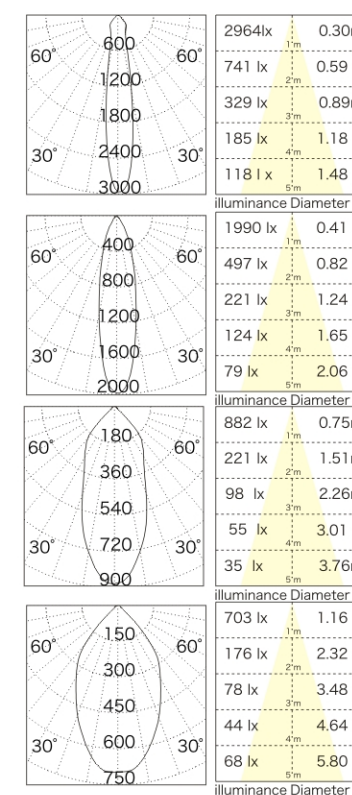



## FC2001

The outer shell is made from cold roll steel, the middle part is by die-casting aluminum;

Light are all paint sprayed in white, black;

Inner ring parts can be rotatable in 30degree in horizontal direction and 20degree in vertical direction, flexible and practical;

Durable, lamp body is hard out of shape;

matching with all LED QR-B51, QR-CB51, LED PAR16 and light source;

Application for star hotel, restaurant, shopping mall, villa, showroom, museum and other interior project.




5/7W Module



LED QR-B51



LED PAR16

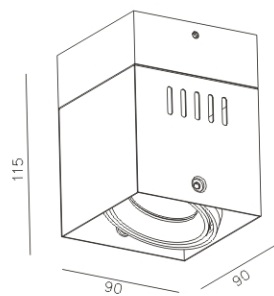

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC2001	NULL	NULL	NULL	NULL	NULL	NULL	White/ Black	NULL	NULL	Size/CTN:485x455x345mm G.W./CTN:11.44kgs PCS/CTN:18pcs



## FC1004-L

Housing Die-cast aluminum;

Finishing Powder coated in white;



Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;

Lens diffuser, beam angle 24°/36°/60°;

Exclusive design, brand led and driver to ensure long lifetime and high performance;




Certificated by CE, RoHS;

.Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

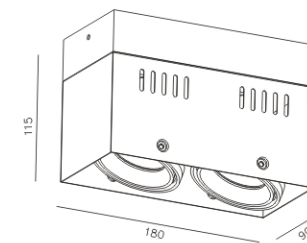

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
Fc1004-L	2x10W	24° 36° 60°	3000K	1490lm 1470lm 1400lm	LENS	>82	White/ Black	220-240VAC	NULL	Size/CTN:495x485x345mm G.W./CTN:15.22kgs PCS/CTN:12pcs

CRI90 is available

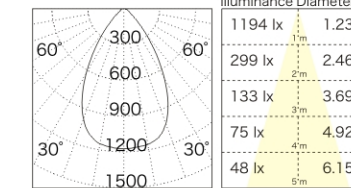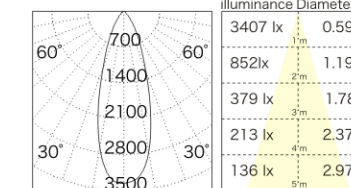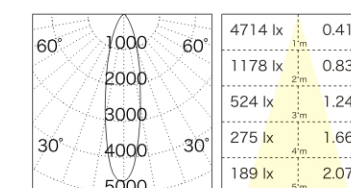


2x10W IES




## FC1004-R

Housing Die-cast aluminum;  
 Finishing Powder coated in white;  
 Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;  
 Reflector diffuser, beam angle 15°/24°/38°/60°;  
 Exclusive design, brand led and driver to ensure long lifetime and high performance;  
 Certificated by CE, ROHS;  
 .Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

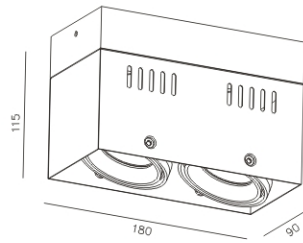

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC1004-R	2x10W	15° 24° 38° 60°	3000K	1571lm 1510lm 1420lm 1360lm	Reflector	>82	White/ Black	220-240VAC	NULL	Size/CTN:495x485x345mm G.W./CTN:15.22kgs PCS/CTN:12pcs

CRI90 is available

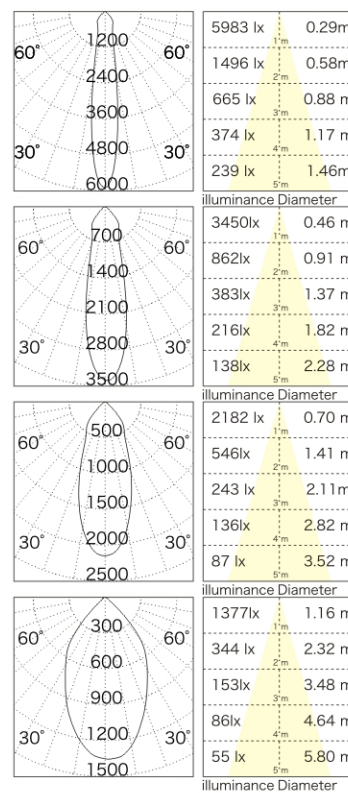


2x10W IES



## FC2002

The outer shell is made from cold roll steel, the middle part is by die-casting aluminum;  
 Light are all paint sprayed in white, black;  
 Inner ring parts can be rotatable in 30degree in horizontal direction and 20degree in vertical direction, flexible and practical;  
 Durable, lamp body is hard out of shape;  
 Matching with all LED QR-B51, QR-CB51, LED PAR16 and light source;  
 Application for star hotel, restaurant, shopping mall, villa, showroom, museum and other interior project.

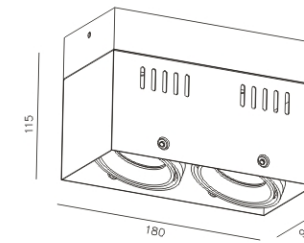


Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC2002	NULL	NULL	NULL	NULL	NULL	NULL	White/ Black	NULL	NULL	Size/CTN:495x485x345mm G.W./CTN:12.22kgs PCS/CNT:12pcs




## FC1005-L

Housing Die-cast aluminum;  
Finishing Powder coated in white;  
Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;  
Reflector diffuser, beam angle 24°/36°/60°;  
Exclusive design, brand led and driver to ensure long lifetime and high performance;  
Certificated by CE, RoHS;  
.Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

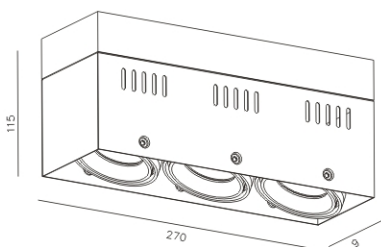

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC1005-L	3x10W	24° 36° 60°	3000K	2235lm 2205lm 2100lm	LENS	>82	White/ Black	220-240VAC	NULL	Size/CTN:485x345x345mm G.W./CTN:10.7kgs PCS/CTN:6pcs

CRI90 is available

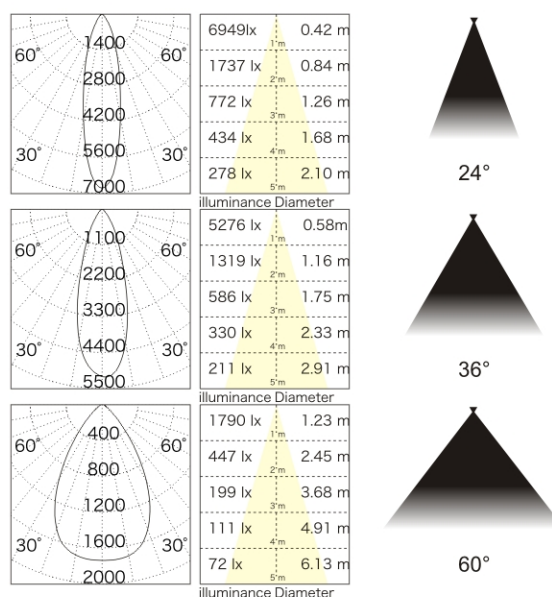


3x10W IES




## FC1005-R

Housing Die-cast aluminum;  
Finishing Powder coated in white;  
Built-in driver, triac dimmable, 0-10V dimmable, dali dimmable as options;  
Reflector cup diffuser, beam angle 15°/24°/38°/60°;  
Exclusive design, brand led and driver to ensure long lifetime and high performance;  
Certificated by CE, RoHS;  
.Application for star hotel, restaurant, shopping mall, villa, residence and other high-end projects.

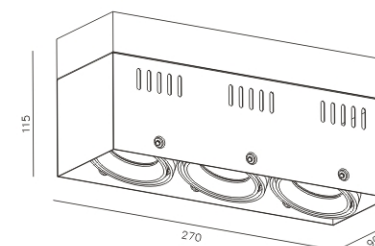

Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC1005-R	3x10W	15° 24° 38° 60°	3000K	2252lm 2180lm 2064lm 1961lm	Reflector	>82	White/ Black	220-240VAC	NULL	Size/CTN:485x345x345mm G.W./CTN:10.7kgs PCS/CTN:6pcs

CRI90 is available

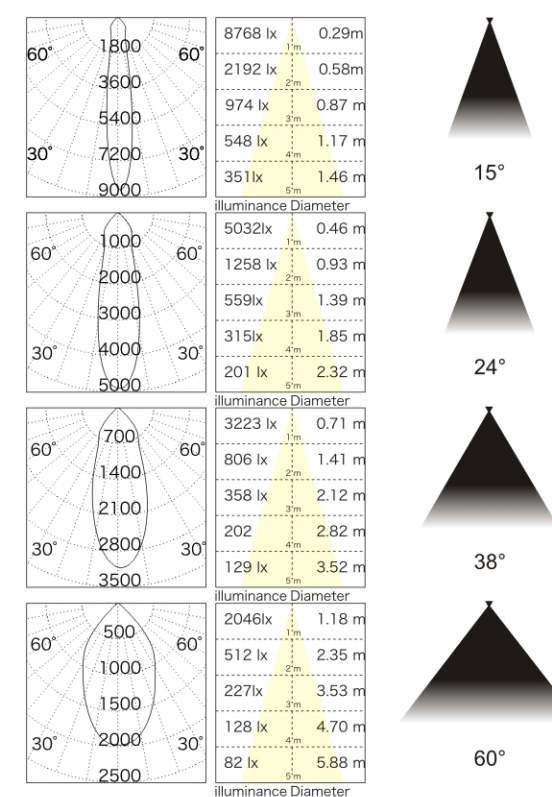

3x10W IES



## FC2003

The outer shell is made from cold roll steel, the middle part is by die-casting aluminum;


Light are all paint sprayed in white, black;

Inner ring parts can be rotatable in 30degree in horizontal direction and 20degree in vertical direction, flexible and practical;

Durable, lamp body is hard out of shape;

matching with all LED QR-B51, QR-CB51, LED PAR16 and light source;

Application for star hotel, restaurant, shopping mall, villa, showroom, museum and other interior project.

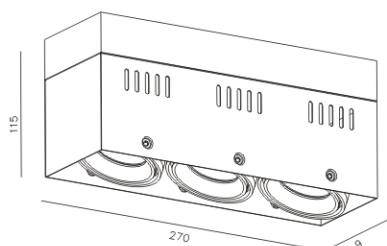

5/7W Module




LED QR-B51



LED PAR16



Model	Power	Beam angle	CCT	Lumen	Diffuser	C.R.I	Finishing color	Input Voltage	Cut hole	Packing details
FC2003	NULL	NULL	NULL	NULL	NULL	NULL	White/ Black	NULL	NULL	Size/CTN:485x345x345mm G.W./CTN:7.94kgs PCS/CTN:6pcs

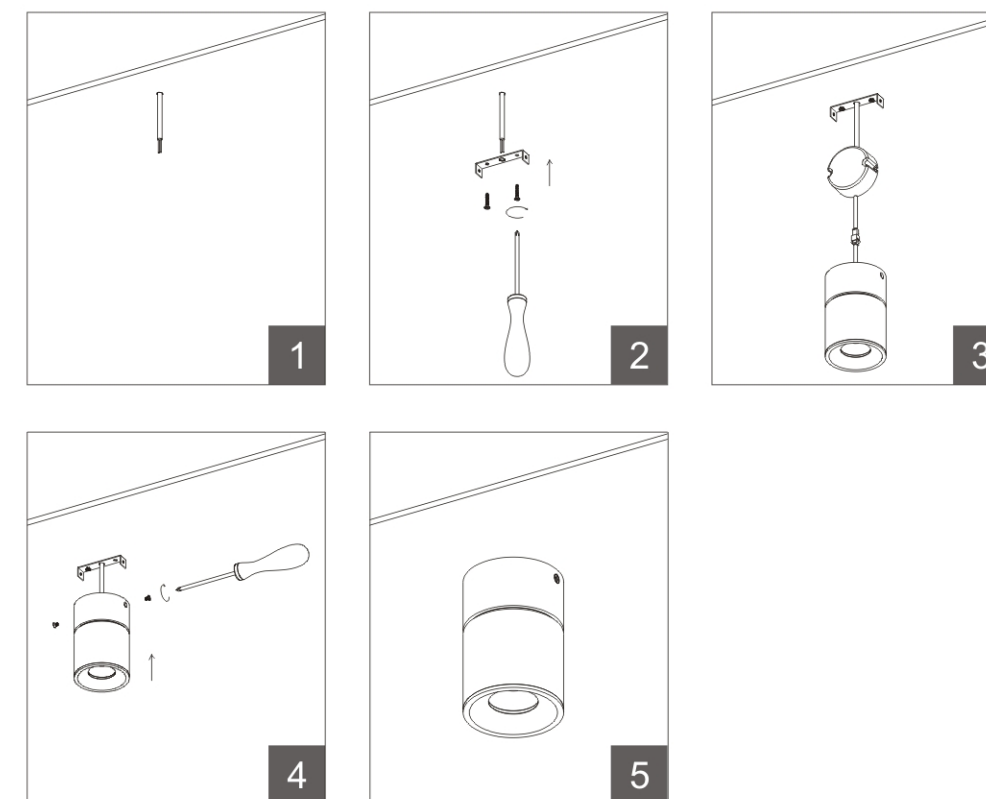

### Installation of Light

1. Please cut off power before installation ( As pic.1).
2. Put wire through the middle hole of holder, then fix the holder tightly with tapping screw (As pic.2).
3. Ensure input voltage for LED driver in range of voltage marked , then closely connect together according to pic.2 and no any bare wire parts (As pic.3).
4. Fix light body tightly with holder (As pic.4).
- 5.The demonstration below is only suitable for the indicated models (As pic.5).

### Hygiene & Safety

We advise to use the soft cloth to clean up and do not attempt to use any chemical agent in order to avoid any damages from the surface.

**For your safety, please cut off the power supply before changing or cleaning the lamp source.**